


**CONTROL DATA TRANSLATOR - ADX2100**

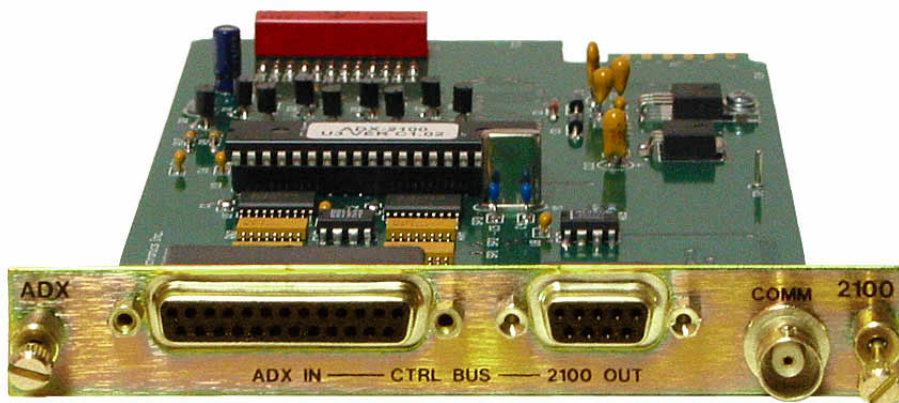

**FEATURES**

- Allows incorporation of 2100 Series routers into Sigma ADX systems
- Expands 2100 Series systems beyond 16 channel barrier
- Occupies one slot in 2100 series frame
- Allows GUI control of 2100 Series systems (SigMatrix)
- Replaces SCI2144 in 2100 Series systems

**SPECIFICATIONS**

**INPUTS**

Control Levels	Four	Control Panels	Up to 16 on Comm. Line
Communication Line	Coaxial, up to 2000 feet	Connectors	BNC for Comm. Line
External Sync Ref.	Not applicable - synced to ADX system		9 Pin "D" for control bus (to 2100)
			25 Pin "D" for control bus (from ADX)

Prices and Specifications are subject to change without notice.