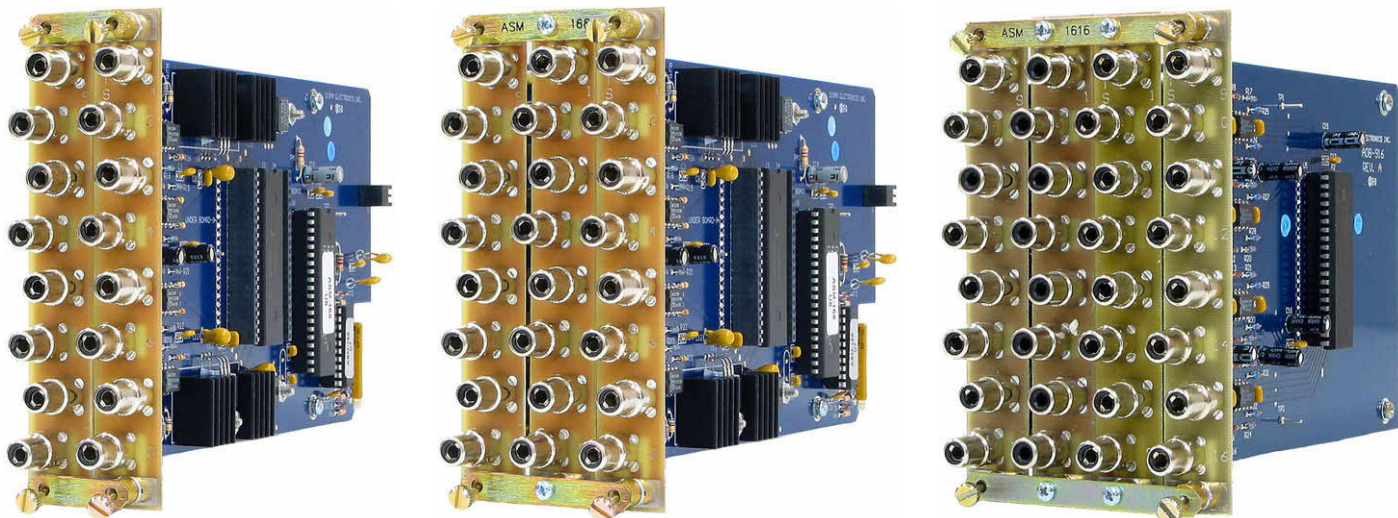


ANALOG UNBALANCED AUDIO SWITCH MODULES**FEATURES**

- High Quality, Low Cost
- 8x8, 16x8, and 16x16 Input/Output
- RCA jacks for unbalanced applications

MODELS

- ASM88 (8x8)**
- ASM168 (16x8)**
- ASM1616 (16x16)**

SPECIFICATIONS**INPUTS**

Eight or sixteen, 15 k Ω , unbalanced

Level +18 dBu maximum

Connectors RCA

OUTPUTS

Eight or sixteen, 15 k Ω , unbalanced

Level +21 dBu max. into HiZ

+18 dBu into 600 Ω

Gain Unity, ± 0.2 dB into 600 Ω

THD 0.03% max. @ +18 dBm, worst case

Freq. Response ± 0.2 dB, 20 Hz to 100 kHz

Crosstalk 90 dB @ 1 kHz, worst case

70 dB @ 20 kHz, worst case

Hum & Noise -95 dBu, 20 kHz bandwidth

Connectors RCA

Prices and Specifications are subject to change without notice.