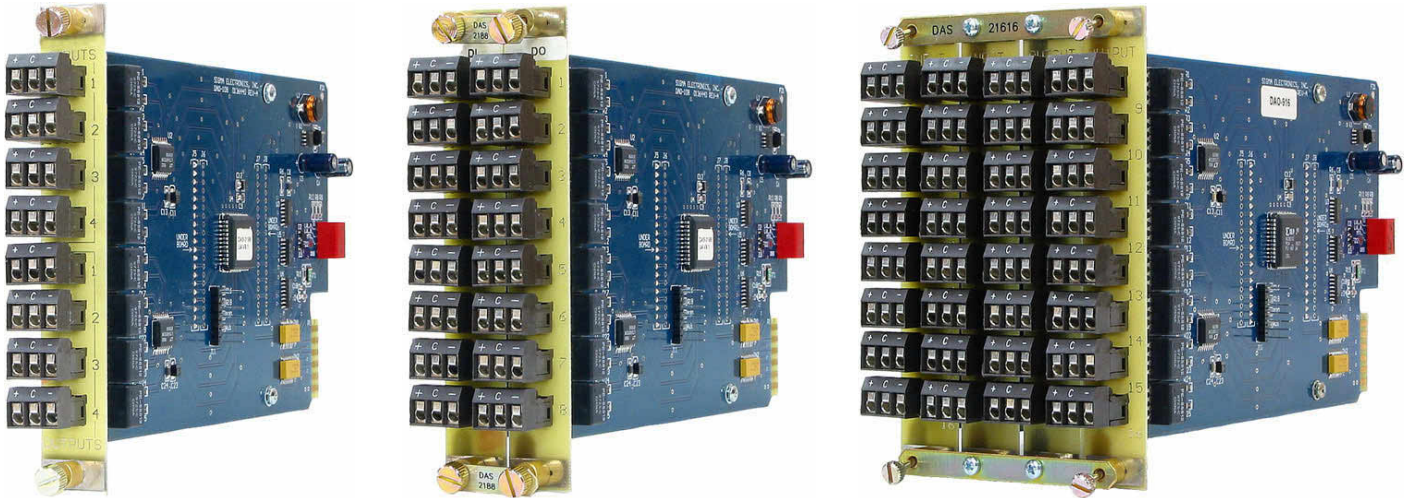


**DIGITAL AUDIO SWITCH MODULES****FEATURES**

- High Quality, Low Cost
- 4x4, 8x8, and 16x16 Input/Output
- Plug-in, balanced audio connectors

**MODELS**

- DAS2144 (4x4)**
- DAS2188 (8x8)**
- DAS21616 (16x16)**

**SPECIFICATIONS****INPUTS**

Four, eight, or sixteen, 110 $\Omega$  terminated  
Level 7V p-p max.  
Coupling Transformer  
Common Mode Rej. 7V Peak DC to 20 kHz

**OUTPUTS**

Four, eight, or sixteen, 110 $\Omega$ , impedance  
Level 7V p-p max. (3.7V p-p typ.)  
Coupling Transformer  
Output Isolation >50 dB  
Rise & Fall Time <30 nsec (10% to 90%)  
Common Mode Noise 30 dB below signal  
Jitter <20 nsec  
Electrical Length 70 nsec typical

Prices and Specifications are subject to change without notice.