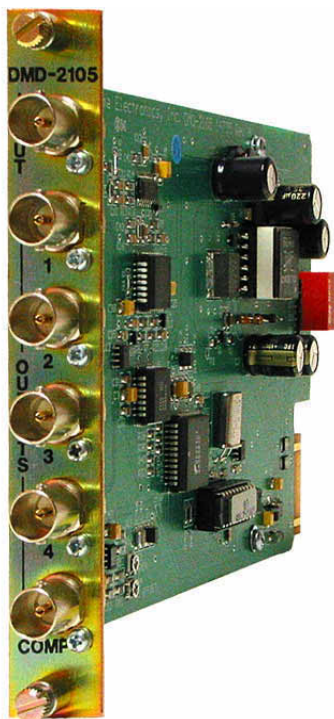


**1X4 DIGITAL VIDEO MONITORING DA , SMPTE259M,  
1 NTSC/PAL OUT - DMD2105****FEATURES**

- High Quality, Low Cost
- 1x4 Digital Input/Output with analog monitoring output
- NTSC or PAL analog composite output
- Equalization and reclocking
- 1 slot 2100 series module

**SPECIFICATIONS****INPUTS**

One (1), SMPTE 259M-C	
Serial Data Rates	270 Mb/s
Level	800 mV p-p
Return Loss	15 dB min. 5MHz - 270MHz
Input Cable Length	1000ft. max Belden 1694A
Connectors	75Ω BNC

**OUTPUTS**

Four (4), Digital	800 mV p-p ( $\pm 10\%$ )
One (1) analog	1.4V p-p max.
Digital Return Loss	15 dB min. 5 MHz to 270 MHz
Analog Return Loss	35 dB min. to 6 MHz

Prices and Specifications are subject to change without notice.