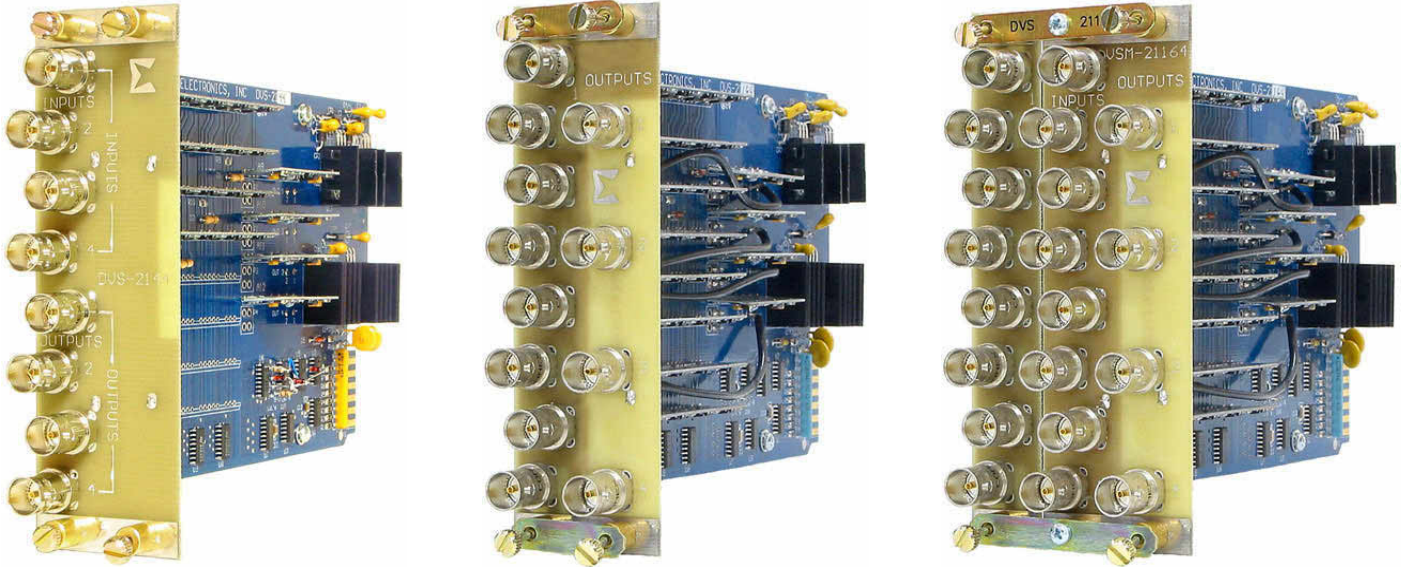


DIGITAL VIDEO SWITCH MODULES**FEATURES**

- High Quality, Low Cost
- 4x4, 8x4, and 16x4 Input/Output

MODELS

- DVS2144 (4x4)**
- DVS2184 (8x4)**
- DVS21164 (16x4)**

SPECIFICATIONS**INPUTS**

Four, eight, or sixteen, 75 Ω terminated
Level 800 mV p-p
DC Offset ± 4 VDC max.
Data Rate Up to 400 Mb/s
Connectors BNC

OUTPUTS

Four (4), 75 Ω , impedance
Level 800 mV p-p $\pm 10\%$
Output Isolation >45dB
Over Shoot <10% of total amplitude
Rise & Fall Time <1.5 nsec (20% to 80%)
Jitter <0.5 nsec
Electrical Length 6 nsec typical
Connectors BNC

Prices and Specifications are subject to change without notice.