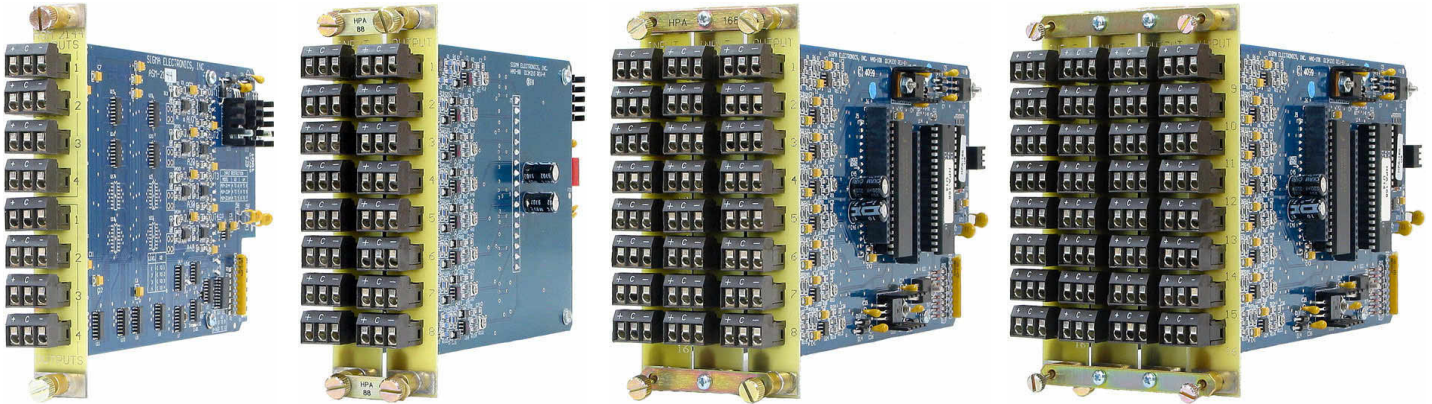


**ANALOG BALANCED AUDIO SWITCH MODULES****FEATURES**

- High quality, low cost
- 4x4, 8x8, 16x8, and 16x16 Input/Output
- Plug-in, balanced audio connectors

**MODELS**

- ASM2144 (4x4)**
- HPA88 (8x8)**
- HPA168 (16x8)**
- HPA1616 (16x16)**

**SPECIFICATIONS****INPUTS**

Four, eight, or sixteen, 50 k $\Omega$ , balanced  
Level +24 dBu max. 600  $\Omega$   
Bandwidth >150 kHz  
Connectors 3 pin pluggable

**OUTPUTS**

Four, eight, or sixteen, 300  $\Omega$ , balanced  
Level +21 dBm max. 600  $\Omega$   
Gain Adjustment  $\pm 3$  dB, set for unity  
THD <0.1% @ +10 dBm  
Freq. Response  $\pm 0.1$  dB, 20 Hz to 100 kHz  
Crosstalk 80 dB to 20 kHz  
Hum & Noise <-80 dBm to 20 kHz  
Connectors 3 pin pluggable

Prices and Specifications are subject to change without notice.