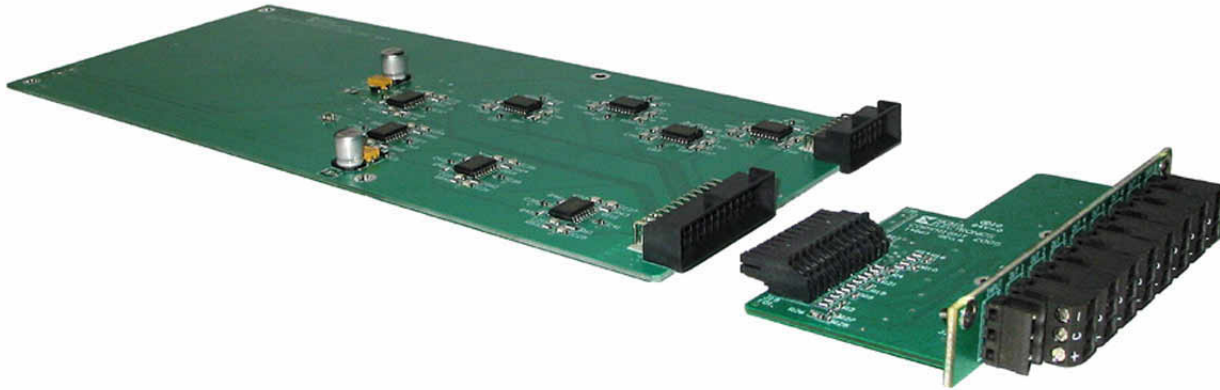


**8 OUTPUT BALANCED-BALANCED ANALOG AUDIO DA
EXPANSION MODULE - SADAX8P****FEATURES**

- Mates with ADA8P to make 1x16 balanced audio DA
- Economical, compact design
- Highest quality professional audio equipment
- Combines with all Sabre Series modules in same frame

SPECIFICATIONS**Performance**

Frequency Response	+/-0.1 dB max., 20Hz to 20kHz (unity gain)
Bandwidth (-3 dB)	150kHz min. (unity gain)
Distortion (THD)	0.1% max. at Pout = +10dBu 0.15% max. at Pout = +21dBu
Fixed Gain Levels	-8dB, -4dB, 0dB, +4dB, +8dB, and +12dB
Gain Range	+/- 0.33 dB
Hum and Noise	-75 dBu at unity gain 20kHz flat BW
Electrical Length	5 ns typical

Outputs

Quantity	8
Connectors	3-pin Phoenix, screw terminal
Impedance	0 Ω
Signal Level	12.28 Vrms max. audio (+24dBu)
Out to Out Isolation	70dB min. at 15kHz

Environmental

Num. Slots Occupied	1
Operating Temp.	0° to 50° Celsius
Power - 16 out (total for both)	17.3W, 24VDC, 360mA (unity gain) 28.3W, 24VDC, 590mA (+12dB gain)

Prices and Specifications are subject to change without notice.