


**1X6 Y/C DA WITH 4 PIN "S-VIDEO" CONNECTORS - SDA2182**

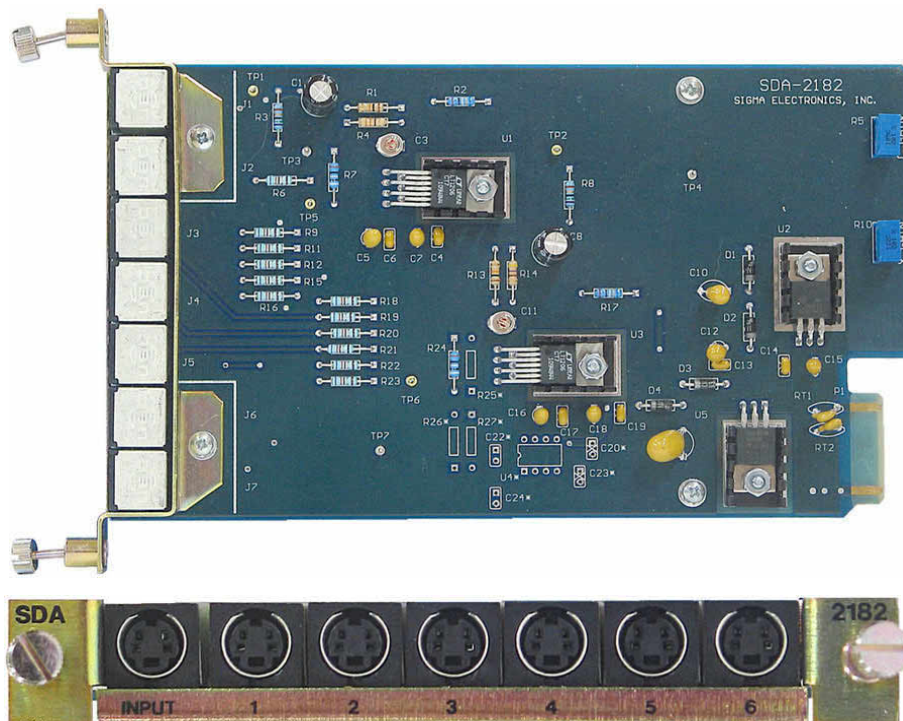

**FEATURES**

- High Quality, Low Cost
- 1x6 Input/Output
- Y/C Distribution
- 4 Pin "S Video" Connectors
- 1 slot 2100 series module

**SPECIFICATIONS**

**INPUTS**

One (1), Y/C, 75Ω, Term., AC coupled  
 Level 1.4 V p-p max.  
 2 V p-p C max.  
 Return Loss 35 dB to 10 MHz  
 Gain Range ± 1.5 dB  
 Connectors 4 Pin "Mini Din"

**OUTPUTS**

Six (6), Y/C, source terminated  
 Bandwidth 30 MHz  
 Differential Phase 0.2° to 5 MHz  
 Differential Gain 0.2% to 5 MHz  
 Tilt 1% Maximum  
 Freq. Response ± 0.1 dB to 15 MHz  
 Return Loss 35 dB to 10 MHz  
 Channel Δ 2 nsec

Prices and Specifications are subject to change without notice.