


32X32 MASTER CONTROL PANEL, BUTTON PER SOURCE/DESTINATION - SYX3232

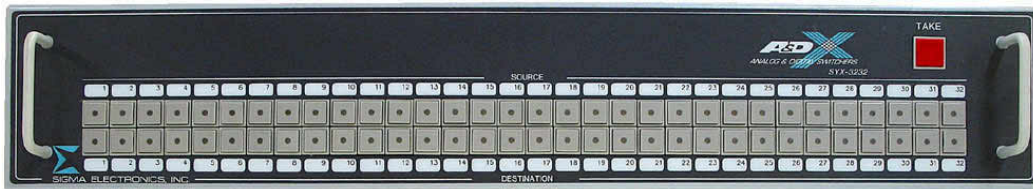

FEATURES

- Active Push Buttons
- Button Per Source/Destination

SPECIFICATIONS

Interface	Active push buttons	Required SCI Module	ADX-SCI or MRX-SCI
Sources	1-32, LED illuminated	Compatibility	Sigma ADX, & MRX systems
Destinations	1-32, LED illuminated	Applications	Routing Systems that require active follow mode push button control
Take	Preset or AutoTake		
Control Levels	Follow mode only		
Connection	BNC/Coax, 2000 feet max.	Power	9 Vdc 900mA, wall transformer included
Configuration	Rack Mount	Mechanical	2 RU, 3.5"H x 19"W x 2.5"D
	Ball Stud hardware included		

Prices and Specifications are subject to change without notice.