


**1X6 UTILITY AES/EBU DA - UDA2102**

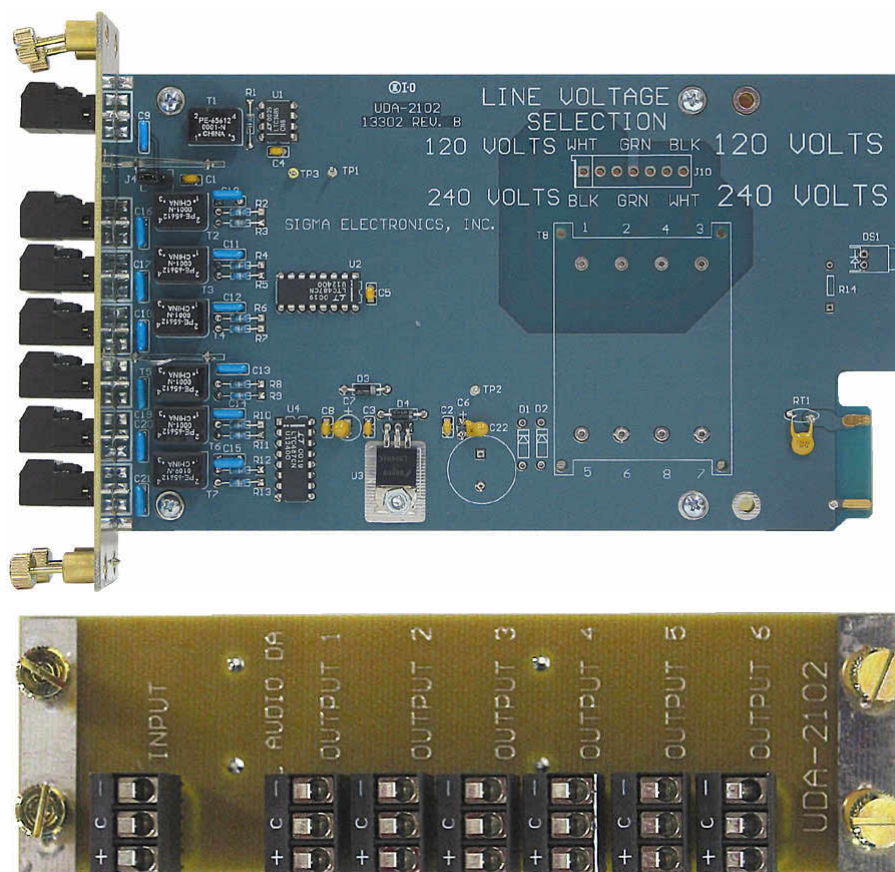

**FEATURES**

- High Performance, Low Cost
- AES/EBU Digital Audio
- 1x6 Input/Output
- 2 slot 2100 series module

**SPECIFICATIONS**

**INPUTS**

One (1), AES3-1992 transformer balanced  
 Level 2-7 Vp-p  
 CMR 7 Volt peak, DC to 6 MHz  
 Impedance 110 Ω  
 Audio Sample Rates AES/EBU encoded data,  
 28 kHz to 54 kHz, Auto-detect  
 Input Cable Length 500 ft. max (Belden 1800A)  
 Connectors Pluggable Terminals

**OUTPUTS**

Six (6), AES3-1992 transformer balanced  
 Impedance 110 Ω  
 Data Jitter < ± 3nSec typical at 300 ft  
 input cable length  
 Signal Level 2-5 Vp-p  
 Propagation Delay 50 nSec nominal

Prices and Specifications are subject to change without notice.