
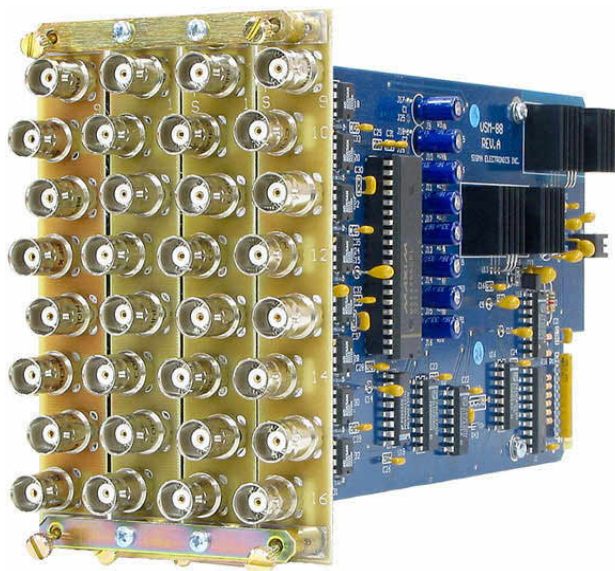


ANALOG VIDEO SWITCH MODULES (STANDARD BW)

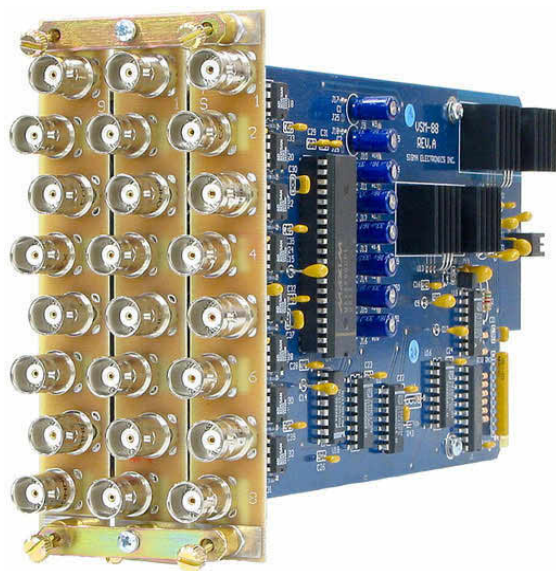

FEATURES

- High Quality, Low Cost
- 16x8 and 16x16 Input/Output
- NTSC/PAL switching

MODELS

- VSM168 (16x8)**
- VSM1616 (16x16)**

SPECIFICATIONS

INPUTS

Sixteen, 75Ω, terminated

AC Coupled

Level 1.4 V p-p max.

Return Loss 30 dB @ 5 MHz

Gain Variation ±0.2 dB

Gain Setting Adjusted for unity

Connectors BNC

OUTPUTS

Eight or sixteen, 75Ω impedance

Level 1.4 V p-p max.

Bandwidth 20 MHz

Differential Phase 1° max., 10 - 90% APL

Differential Gain 0.5% max., 10 - 90% APL

Tilt, Field, & Line 1% Maximum

Freq. Response ±0.5 dB, 50 Hz to 5 MHz

Crosstalk 50 dB min. to 5 MHz

Hum & Noise 70 dB min. below 1 V p-p

Connectors BNC

Prices and Specifications are subject to change without notice.